

L-VRSG-2, L-VRSG-3

Vandal Resistant Security Louver

for 1 3/4" Thick Doors


STANDARD FEATURES

- * 18 ga. cold rolled steel frame
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Inverted "V" design
- * Blades 24 ga. steel, hemmed edges
- * 16 ga. steel, 3/4" x 3/4" security grille
- * Standard finish = (GPZ) Gray Primer
- * #6 x 1 3/4" Phillips Head SMS
- * Free area = 45%

OPTIONAL FEATURES

- * Thru bolts for 1 3/4" doors (suffix - "TB")
- * Aluminum 18 x 16 mesh insect screen (installed on exterior unless otherwise noted)
- * Torx Security Screws
- * See page L2 for optional finishes
- * Zinc Electro-plating
- * Galvanneal - A40 Steel

Designed for use on 1 3/4" thick doors manufactured within door industry tolerance of +/- 1/16".

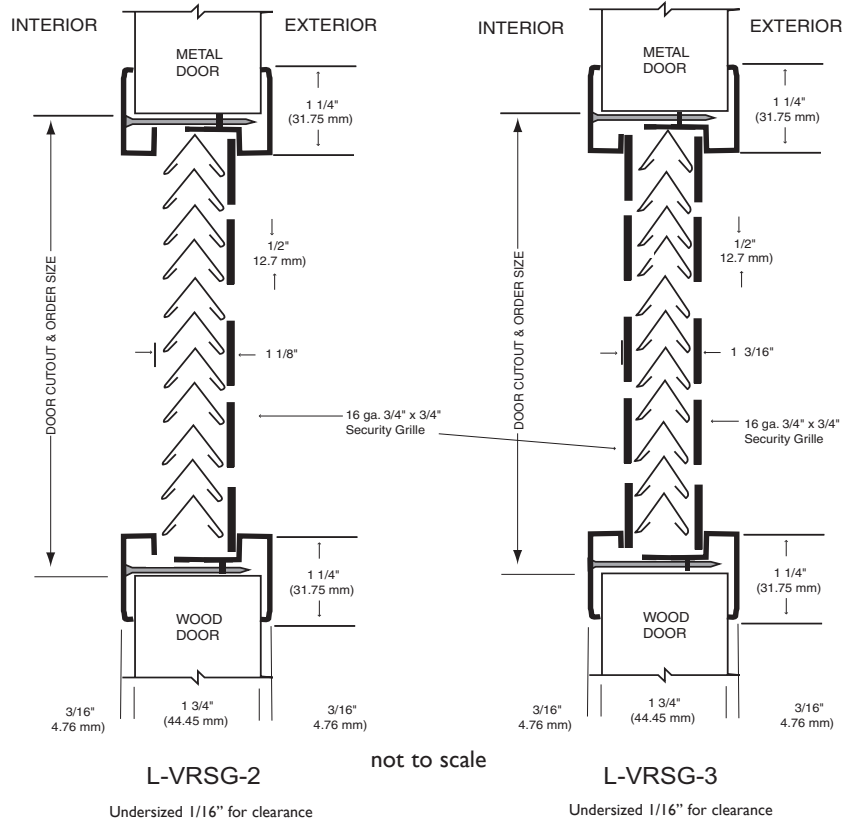

L-75 SERIES Darkroom Louvers

Adjusts for 1 3/4" up to 2 1/4" Thick Doors

STANDARD FEATURES

- * 20 ga. cold rolled steel frame
- * Mitered and welded corners
- * Welded reinforcing clips at corners
- * Blades .040 aluminum
- * Counter-sunk mounting screwholes
- * #8 x 3/4" Phillips head TEK screws
- * Available in uneven and fractional sizes.
- * Free area 55%
- * Standard finish - (TBL) Textured Black

OPTIONAL FEATURES

- * Thru Bolts (TB) for 1- 3/4" door
- * Aluminum 18 x 16 mesh insect screen (installed on exterior side unless noted otherwise)
- * Torx Security Screws
- * See page L2 for optional finishes
- * Zinc electro-plating

