

## L-700 SERIES



### No Vision Door and Partition Louver Adjusts for 1 3/8", 1 3/4" up to 2 1/4" Thick Doors

#### STANDARD FEATURES

- \* 20 ga. cold rolled steel frame
- \* Mitered and welded corners
- \* Welded reinforcing clips at corners
- \* Inverted "V" design
- \* Blades 24 ga. steel; hemmed edges
- \* Counter-sunk mounting screw-holes
- \* #8 x 3/4" Phillips head TEK screws
- \* Available in uneven and fractional sizes
- \* Standard finish = (GPZ) Gray Primer
- \* Free area = 70%

#### OPTIONAL FEATURES

- \* Thru bolts (TB) for 1-3/4" door when specified
- \* Aluminum 18 x 16 mesh insect screen (installed on exterior side unless noted otherwise)
- \* Torx Security Screws
- \* See Page L2 for optional finishes
- \* Zinc electro-plating
- \* Galvanneal A40 Steel (L-700-A and L-700-C only)

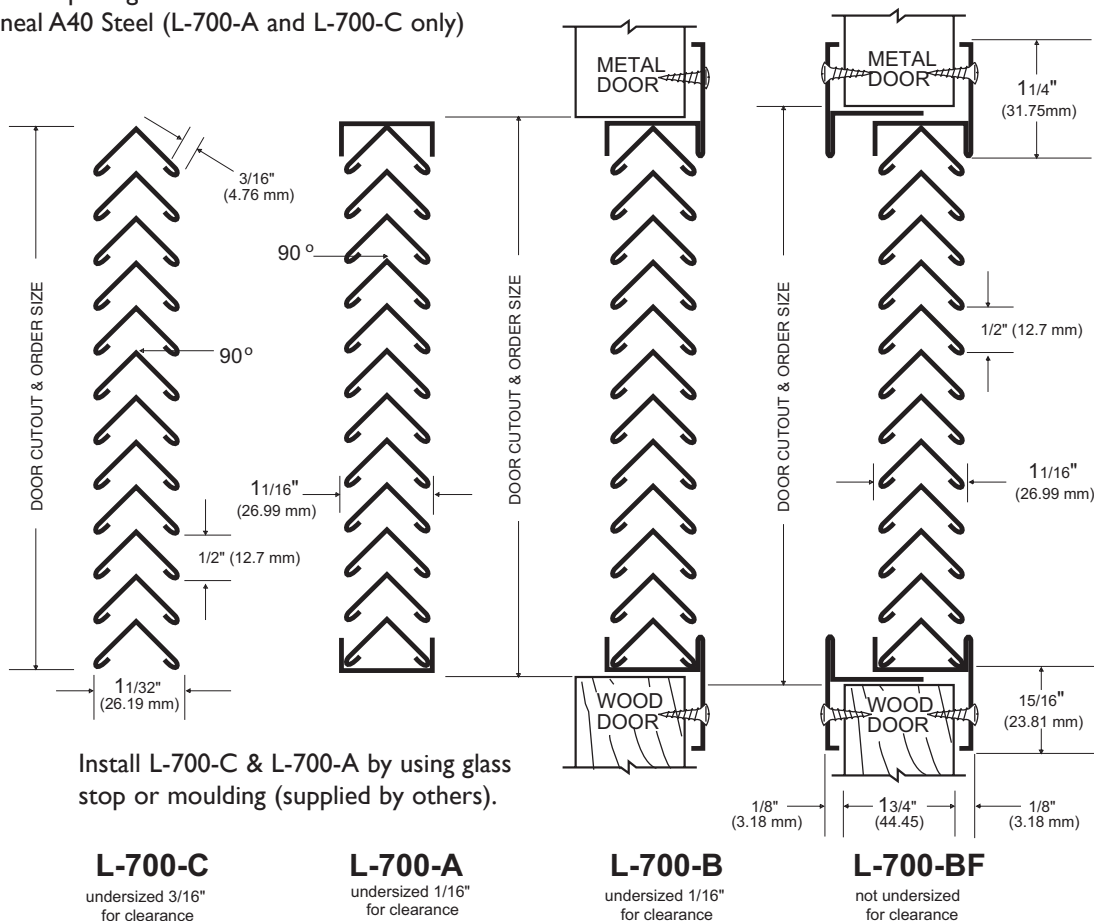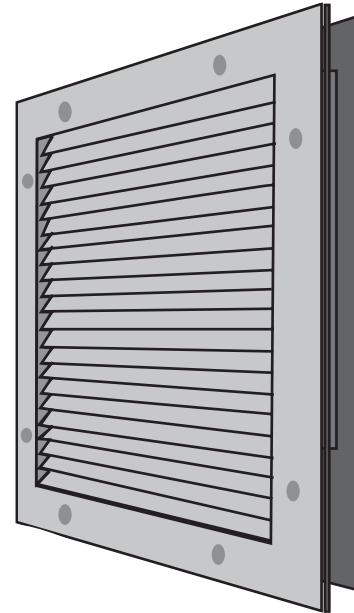

not to scale